

Client \_\_\_\_\_ Quantity \_\_\_\_\_  
Project \_\_\_\_\_ Position \_\_\_\_\_**FUN 700****Model:** F70/40PCE/T**Cod:** MP01012123000**Technical data**


<b>Modularity:</b>	Top
<b>Dimension (mm):</b>	400x700x300
<b>Total electric power (kW):</b>	5,2
<b>Electric power (V):</b>	380-415
<b>Ampere (A):</b>	12
<b>Phases:</b>	3N
<b>Cable section (mmq):</b>	5G1,5
<b>Frequency (Hz):</b>	50-60
<b>Net volume (m3):</b>	0,084
<b>Packing dimensions (mm):</b>	477x776x612
<b>Gross weight (kg):</b>	28
<b>Gross volume (m3):</b>	0,227

**Features**

<b>Working top:</b>	Made of AISI 304 stainless steel with a thickness of 10/10 mm
<b>Knobs:</b>	Knobs are made from a sturdy heat-resistant polymer blend and are equipped with liquid anti-leakage washer

Electric hob 2 burners top version. Top made of AISI 304 stainless steel thickness 8/10; covering in AISI 304 stainless steel thickness 8/10; bottoms and internal parts in AISI 430 steel; internal reinforcements made of anti-corrosion material (aluminised sheet metal). Hob equipped with cast iron electric plates with stainless steel edge sealed to top. Each plate is controlled by a switch with 6 possible temperature adjustments and is equipped with indicator lights to show that electrical power is being provided and that the plates are working. Model with round plates Ø 220 mm. - 2 plates x 2.6 kW. Total power 5.2 kW Electrical power supply VAC 400 + 3N 50÷60 Hz. Can be set up on bridge system, or on neutral base with optional doors

**Technical draw**

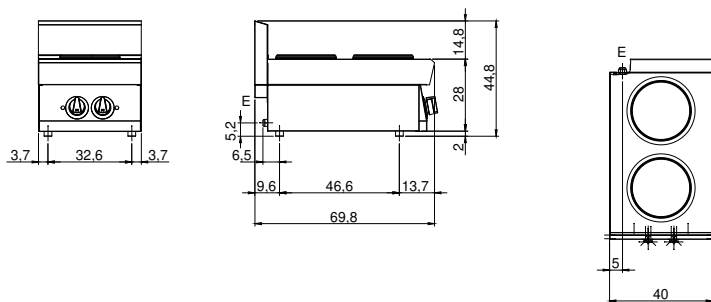

**E:** Electric power