[라] modular



Client	Quantity
Project	Position

ROC 1100

Features

Model: R110/120PCGB/P

Cod: MP01015115055

Technical data


Modularity:	On cabinet with doors
Dimension (mm):	1200x1100x870
Total gas power (Kcal/h):	33534
Total gas power (kW):	39
Gas connection:	1/2"
Net volume (m3):	1,148
Packing dimensions (mm):	1280x1272x1274
Gross weight (kg):	196
Burner power 1 (kW):	5,5
Burner power 2 (kW):	7,5
Burner power 3 (kW):	7,5
Burner power 4 (kW):	5,5
Burner power 5 (kW):	5,5
Burner power 6 (kW):	7,5
Gross volume (m3):	2,074

Burners:	Single and double crown cast iron burners with brass burner cap
Grill:	For single burner in cast iron or stainless steel (optional) dishwasher safe
Working top:	Realizzato in acciaio inox AISI 304 spessore 2 mm con bacinelle in acciaio inox
Knobs:	Made of aluminum with IPX5 water protection
Handles:	The brushed aluminum handles allow for a secure and sturdy grip with a ergonomic lines
Flue:	Made of AISI 304 stainless steel
Kit Gas:	Natural gas conversion kit 30/50 m/bar (tested with natural gas G20)

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.

Gas boiling unit with 6 burners, model on cabinet with doors. Side panels, bottom and back made of stainless steel. Top made of AISI 304 thickness 20/10 designed for flush alignment. Gas supply by safety taps with thermocouple and pilot burner for the automatic ignition of main burner. Radioused corners top, easy to clean, equipped with high thick enamelled cast-iron hobs resistent to acid, alkali and flame. Equipped with high-power cast iron/brass rapid burners with containers in stainless steel that can be extracted for easy cleaning. nr.3 burners 7.5 kW and nr.3 burners 5.5 kW. Special design knobs to avoid water penetration in the control panel on both sides. Base completely made of stainless steel. Doors with stainless steel tubular handles. Adjustable feet made of stainless steel. IPX4 protection rating. Gas total power 39 kW.

Technical draw

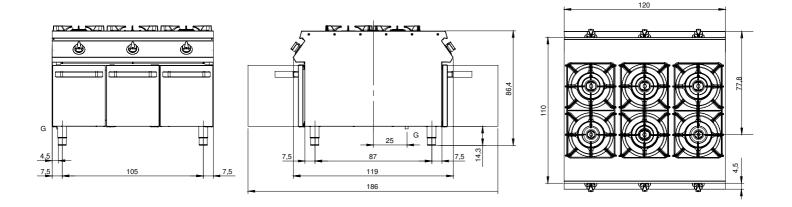

G: Gas connection 1/2"

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.