

Client _____ Quantity _____
 Project _____ Position _____

ROC 700

Model: R70/80TPE/T

Cod: MP01054123001



Technical data


| | |
|----------------------------|-------------|
| Modularity: | Top |
| Dimension (mm): | 800x730x280 |
| Total electric power (kW): | 10 |
| Electric power (V): | 380-415 |
| Ampere (A): | 23 |
| Phases: | 3N |
| Cable section (mmq): | 5G4 |
| Frequency (Hz): | 50-60 |
| Drain size: | 1" |
| Net volume (m3): | 0,164 |
| Packing dimensions (mm): | 880x856x509 |
| Gross weight (kg): | 94 |
| Gross volume (m3): | 0,383 |

Features

| | |
|--------------|---|
| Working top: | Made of AISI 304 stainless steel with a thickness of 20/10 mm |
| Knobs: | Made of aluminum with IPX5 water protection |
| Flue: | Removable gas exhaust flue grill made of cast iron |

Electric solid top with 4 zones, counter top model. Side panels, bottom and back made in stainless steel. Top made in AISI 304 thickness 20/10 with control edge for liquid collection designed for flush alignment. Rear flue made in enamelled cast-iron. Cooking plate made with high thick steel 16M05. 4 independent cooking zones each with 2.5 kW power, marked with a satin cooking surface. Safety thermostat with automatic recovery. Lamp to indicate heating activation and proper working of the equipment. Special design knobs to avoid water penetration in the control panel. Adjustable feet. IPX4 protection rating. Electric power supply VAC 400 3N 50±60 Hz - 10 kW.

Technical draw

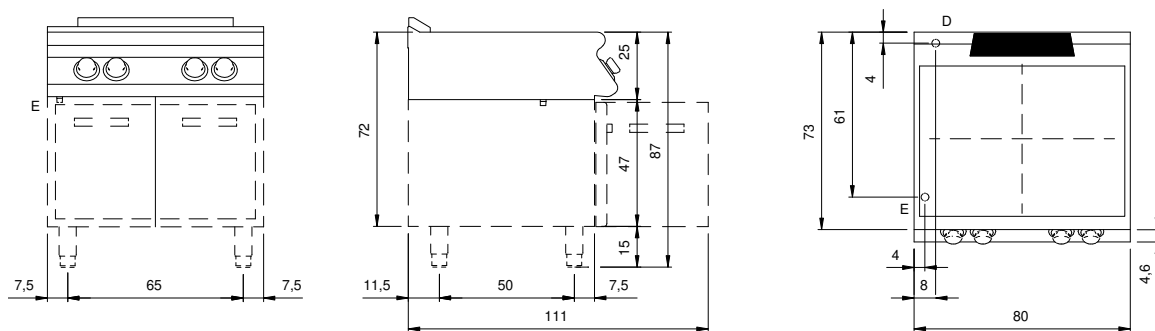

E: Electric power

D: Drain for water