



Client _____ Quantity _____
 Project _____ Position _____

ROC 700

Model: R70/80TPE/P

Cod: MP01054123003

Technical data


Modularity:	On cabinet with doors
Dimension (mm):	800x730x870
Total electric power (kW):	10
Electric power (V):	380-415
Ampere (A):	23
Phases:	3N
Cable section (mmq):	5G4
Frequency (Hz):	50-60
Drain size:	1"
Net volume (m3):	0,508
Packing dimensions (mm):	880x856x1109
Gross weight (kg):	120
Gross volume (m3):	0,835

Features

Working top:	Made of AISI 304 stainless steel with a thickness of 20/10 mm
Knobs:	Made of aluminum with IPX5 water protection
Handles:	The brushed aluminum handles allow for a secure and sturdy grip with a ergonomic lines
Flue:	Removable gas exhaust flue grill made of cast iron

Electric solid top with 4 zones, model on counter with doors. Side panels, bottom and back made in stainless steel. Top made in AISI 304 thickness 20/10 with control edge for liquid collection. Rear flue made in enamelled cast-iron; designed for flush alignment. Cooking plate made with high thick steel 16M05. 4 independent cooking zones each with 2.5 kW power, marked with a satin cooking surface. Safety thermostat with automatic recovery. Lamp to indicate heating activation and proper working of the equipment. Special design knobs to avoid water penetration in the control panel. Base completely made in stainless steel. Presses hinged doors. Ergonomic handle. Adjustable feet made in stainless steel. IPX4 protection rating. Electric power supply VAC 400 3N 50±60 Hz - 10 kW.

Technical draw

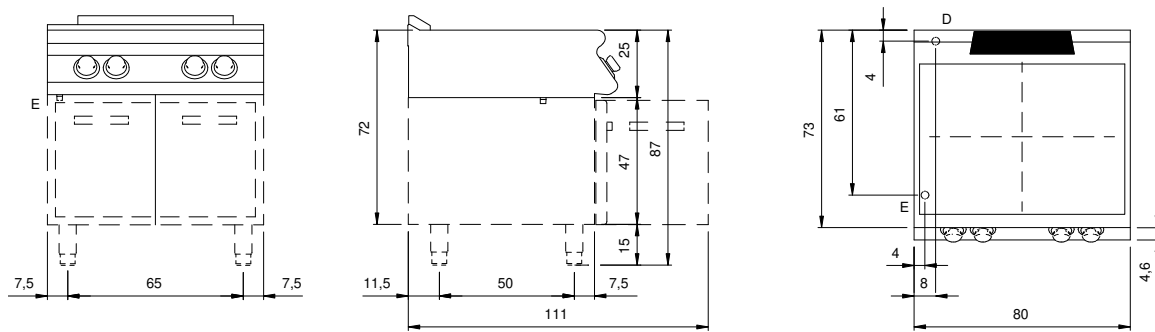

E: Electric power

D: Drain for water