

Client \_\_\_\_\_ Quantity \_\_\_\_\_

Project \_\_\_\_\_ Position \_\_\_\_\_

## FUN 600

**Model:** F60/30FTG/CL/T

**Cod:** MP01372111002



### Technical data


<b>Modularity:</b>	Top
<b>Dimension (mm):</b>	300x600x300
<b>Total gas power (Kcal/h):</b>	4472
<b>Total gas power (kW):</b>	5,2
<b>Cooking zone dimensions 1 (LxD mm):</b>	296x470
<b>Gas connection:</b>	1/2"
<b>Net volume (m3):</b>	0,054
<b>Packing dimensions (mm):</b>	376x695x596
<b>Gross weight (kg):</b>	35
<b>Gross volume (m3):</b>	0,156

### Features

<b>Working top:</b>	Made of AISI 304 stainless steel with a thickness of 8/10 mm
<b>Material of plate:</b>	Polished chrome
<b>Plate finish:</b>	Smooth
<b>Knobs:</b>	Knobs are made from a sturdy heat-resistant polymer blend
<b>Flue:</b>	Made in a single piece, which facilitates the alignment of the modules
<b>Liquid collection container:</b>	Removable and dishwasher safe
<b>Plate:</b>	Polished chromed plate
<b>Upright Splash guard:</b>	On two sides
<b>Kit Gas:</b>	Natural gas conversion kit 30/50 m/bar (tested with natural gas G20)

Fry-top a gas con piastra liscia cromata lucida. Piano con profonda imbutitura in acciaio inox AISI 304; involucro in acciaio inox AISI 430 spessore 8/10; fondi e parti interne in materiale anticorrosione (lamiera alluminata). Piastra di cottura in acciaio cromato ad elevata conducibilità termica per una distribuzione uniforme della temperatura. Provvisto di canaletta anteriore, cassetto estraibile per la raccolta dei grassi residui e di paraspruzzi su tre lati. Bruciatore in acciaio con bruciatore pilota ad accensione piezoelettrica. Erogazione del gas mediante valvola termostatica in sicurezza con termocoppia. Nr. 1 bruciatore x 5,2 kW. - Potenza totale 5,2 kW - Dimensioni della piastra mm. 295x470.

### Technical draw

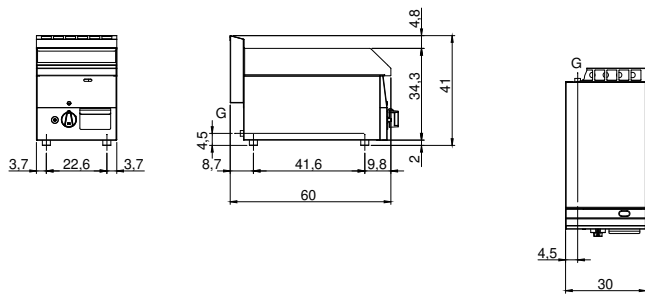

**G:** Gas connection 1/2"