

Client \_\_\_\_\_ Quantity \_\_\_\_\_  
 Project \_\_\_\_\_ Position \_\_\_\_\_

## FUN 650

**Model:** F65/70PVE/T

**Cod:** MP01092122001



### Technical data


<b>Modularity:</b>	Top
<b>Dimension (mm):</b>	700x650x300
<b>Total electric power (kW):</b>	9,2
<b>Electric power (V):</b>	380-415
<b>Ampere (A):</b>	21
<b>Phases:</b>	3N
<b>Cable section (mmq):</b>	5G4
<b>Frequency (Hz):</b>	50-60
<b>Net volume (m3):</b>	0,137
<b>Packing dimensions (mm):</b>	776x776x636
<b>Gross weight (kg):</b>	38
<b>Gross volume (m3):</b>	0,383

### Features

<b>Working top:</b>	Made of AISI 304 stainless steel with a thickness of 10/10 mm
<b>Knobs:</b>	Knobs are made from a sturdy heat-resistant polymer blend and are equipped with liquid anti-leakage washer

Piano di cottura elettrico in vetroceramica, 4 zone. Piano in acciaio inox AISI 304 spessore 8/10; involucro in acciaio inox AISI 430 spessore 8/10; fondi e parti interne in acciaio AISI 430; rinforzi interni eseguiti in materiale anticorrosione (lamiera alluminata). Piano cottura ermetico e facilmente accessibile per la pulizia. Le zone di cottura presentano la massima flessibilità con salita rapida in temperatura sono inoltre dotate di dispositivo contro le sovratemperature. Sei possibilità di regolazione della temperatura per ogni zona. Lampade spia di segnalazione inserimento alimentazione elettrica e funzionamento zone di cottura. Potenza: nr. 2 zone x 2,1 kW e nr. 2 zone x 2,4 kW. - Potenza totale 9 kW. Tensione di alimentazione V AC 400+3N 50÷60 Hz.

### Technical draw

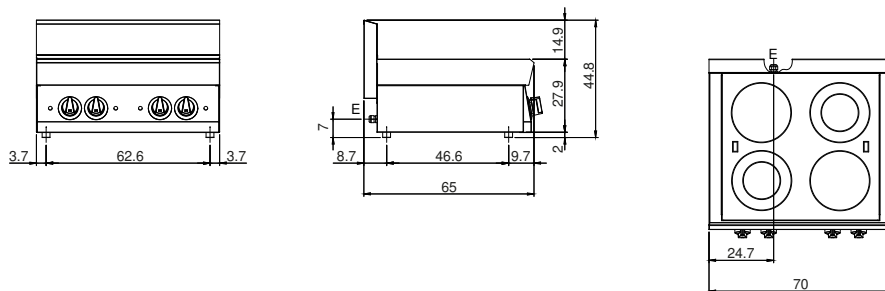

E: Electric power